

Small Animal Control

End Caps

Depending on the placement of the gutter and the pitch of the roof, installation of the gutter guard may result in a hole (Fig. 1) at the end of each gutter run, which becomes attractive to birds, squirrels and other small animals. If you wish to cap these areas, you can use the templates below to create correctly fitted pieces (Fig. 4).

1. Use coil stock aluminum or a scrap piece of the gutter guard.
2. Place the template over the material.
3. Cut to shape with tin snips, or a very sharp pair of scissors, by cutting around the solid lines. Cut the piece a bit long at first; then, holding it up to the hole, mark the correct length and cut to length.
4. Bend the piece in 90° at the dotted lines (Fig. 2).
5. Put the bottom of the piece inside the gutter, then slide the bent flanges into the grooves of the gutter guard (Fig. 3).




Fig. 1




Fig. 2





Fig. 3

Fig. 4

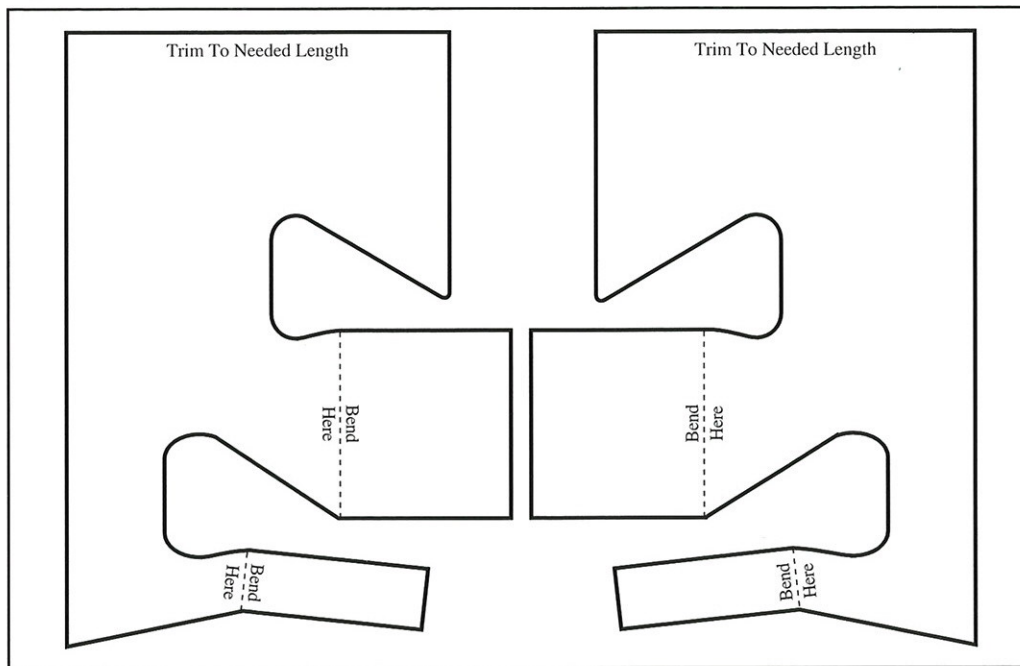

The 
WaterFall®
Gutter Guard System

A Crane Products Ltd. Product

P.O. Box 1898 • Columbus, OH 43216-1898

Tel: 888-326-2638 • Fax: 614-449-0945 • E-mail: craneproducts@craneproducts.com

For more information, visit our web site at: www.water-fall.cc.

WaterFall is a registered trademark of Crane Products Ltd. and its affiliates.
Crane Products Ltd. is a Crane Plastics company.